


**Data Sheet**

Type Number: ..... 4034  
 Designation IEC: ..... 4 LR 44  
 System: ..... Manganese dioxide /  
 Zinc / KOH - Electrolyte  
 UL Recognition: ..... ---  
 Nominal Voltage [V]: ..... 6  
 Typical Capacity C [mAh]: ..... 100  
 Load 20 kOhm, at 20 °C down to 4.4 V

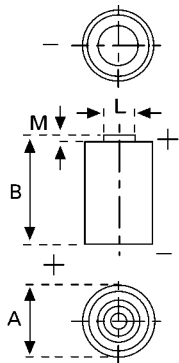

Weight, approx [g]: ..... 10,4  
 Volume [ccm]: ..... 3,3  
 Coding: ..... Manufacturing  
 Quarter/Year by Letter Code

Temperature Ranges [° C]:

	<b>min.</b>	<b>max.</b>
Storage: .....	-10	65
Discharge: .....	-10	65

Dimensions [mm]:

	<b>min.</b>	<b>max.</b>
Diameter [A]: .....	12	13
Height [B]: .....	23,9	25,2
Shoulder Diameter[L]: .....	6,5	
Shoulder Height [M]: .....	0,7	

Segment: ..... Electronic

Main Applications: ..... Photo  
 ..... Electronic

**Typical Capacities (at 20° C):**

Discharge Type:	Load	End Voltage	4.4 V
Continuous	20000 Ω	Time:	380 h
24h/d, 7d/w		Capacity [mAh]:	100
Current [µA]: 300		Energy [mWh]:	530