

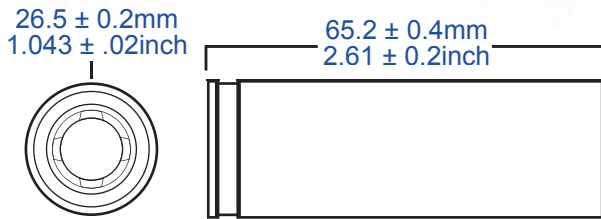
HIGH CAPACITY K226650P01 POWER CELL DATA



PN: LFP26650P-1

DIMENSIONS:

UNDOT 38.3 | RoHS Compliant


SPECIFICATIONS:

Nominal Capacity @ C/5 (Ah)	2.6
Average Operating Voltage @ C/5 (V)	3.2
Internal Impedance @ 1kHz, AC (mΩ)	<9
Weight (g/oz)	80.5 ± 2 / 2.84

RECOMMENDED OPERATING CONDITIONS:

Continuous Discharge (A)	≤10
Pulse Discharge (A) 30 Seconds	26
Charge Current (A)	≤2.6
Charge Voltage Cutoff (V)	3.65
Discharge Voltage Cutoff (V)	2.50
High Operating Temp (°C)	60
Low Operating Temp (°C)	-20

MAXIMUM OPERATING CONDITIONS:

Continuous Discharge (A)	42
Pulse Discharge (A) 30 Seconds	50
Short Discharge (A)	150
Charge Current (A)	5
Charge Voltage Cutoff (V)	4.1
Discharge Voltage Cutoff (V)	2.0

Performance may vary depending on application All specifications and operation conditions are subject to change without notice. This data is for evaluation purposes only. No guarantee is intended or implied by this data. Rev. MDS-700080-002 / A

