


ENERGIZER NO. L92

AAA



Dimensions in mm (inches)

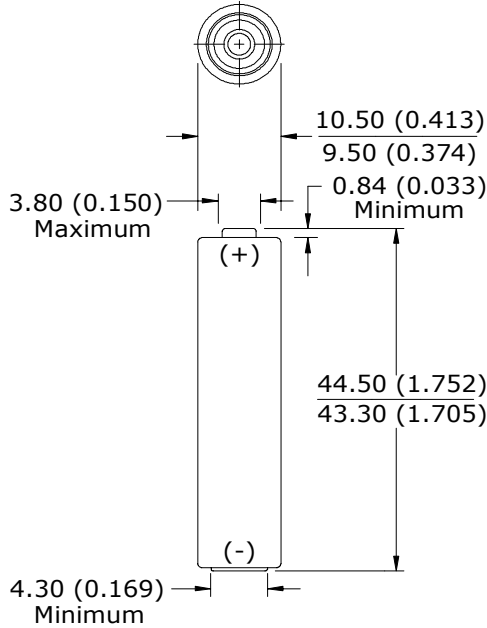

Chemical System: Lithium/Iron Disulfide (Li/FeS₂)

Designation: ANSI-24LF, IEC-FR03

Battery Voltage: 1.5 Volts

Typical Weight: 7.8 grams (0.3 oz.)

Typical Volume: 3.8 cubic centimeters (0.2 cubic inch)

Average Capacity: 1250 mAh (to 1.0 volts)
(Rated capacity at 100 mA drain)

Storage Temp: -40°C to 60°C (-40°F to 140°F)


Operating Temp: -40°C to 60°C (-40°F to 140°F)

Lithium Content: Less than 0.5 grams (0.02 oz.) per cell



Jacket: Non-magnetic Plastic Label

Transportation: Meets requirements of 49CFR 173.185 (b) and IATA special provisions A45.

Shelf Life: 15 years

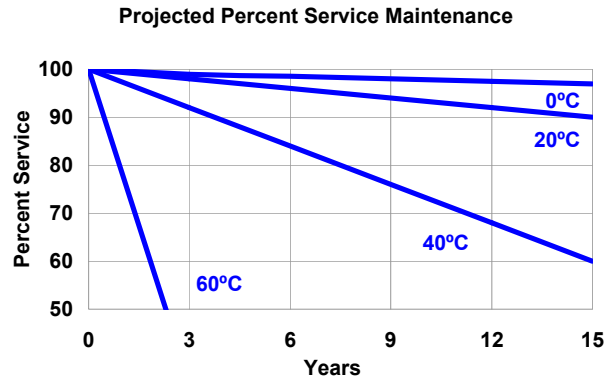

Typical Battery Performance

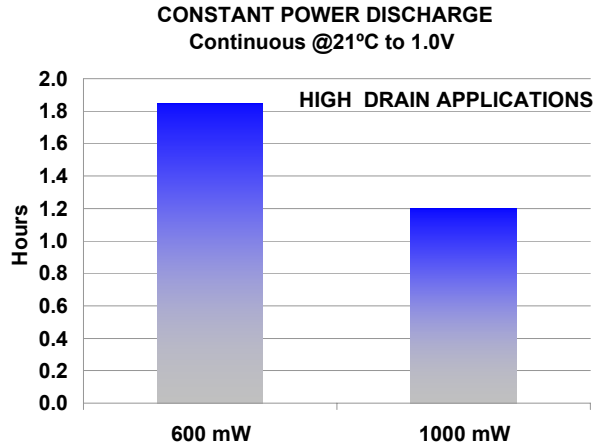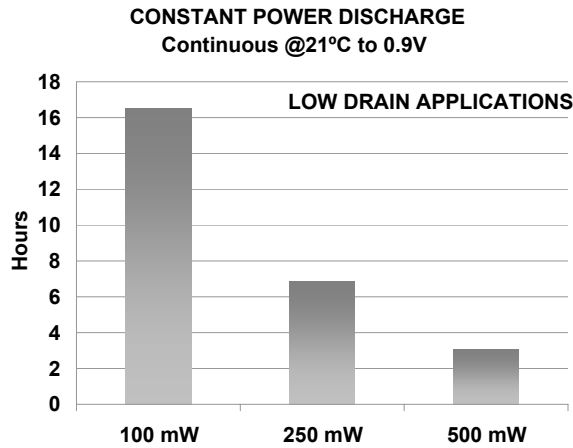

Important Notice


This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.


© Energizer - All Rights Reserved

ENERGIZER NO. L92







Typical Battery Performance

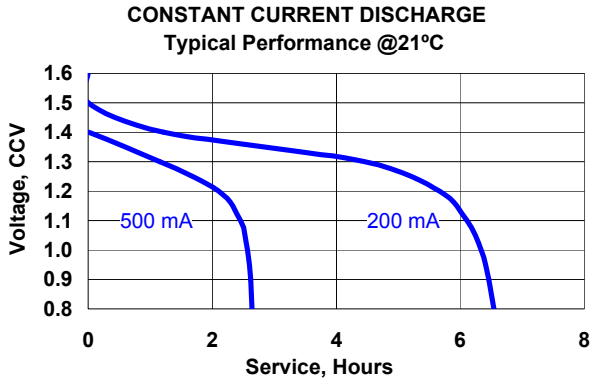

Temperature Effects

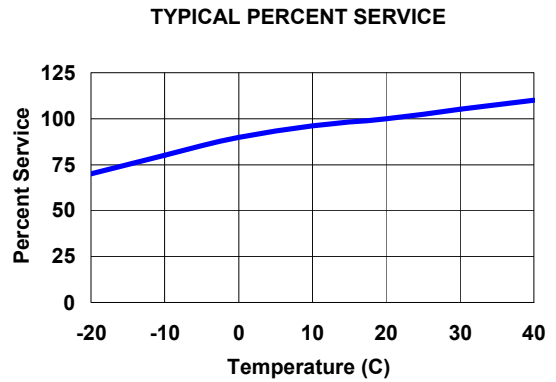

ANSI - IEC Industry Standard Tests @ 20° C

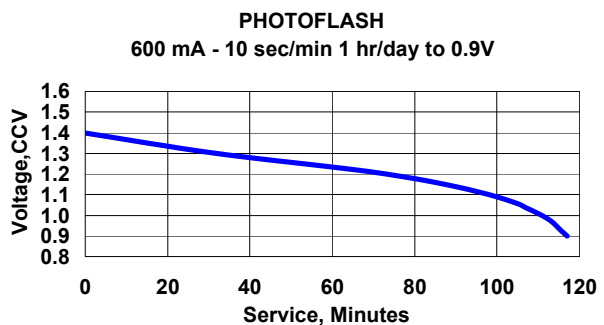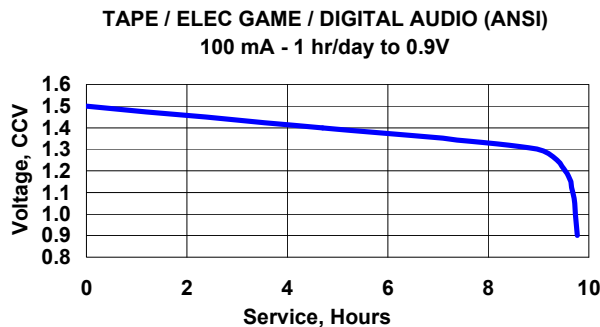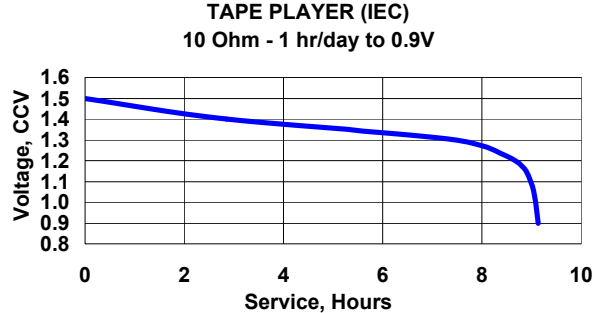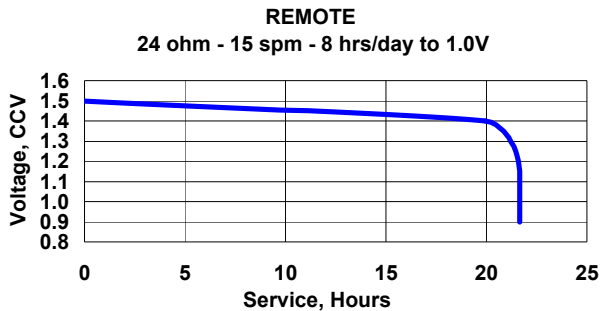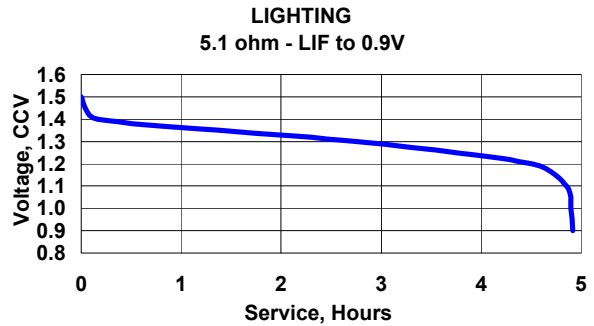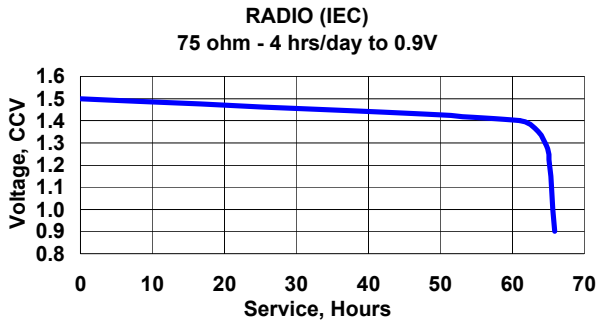

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

© Energizer - All Rights Reserved