


Data Sheet

Lithium Manganese Dioxide

V 28 PXL

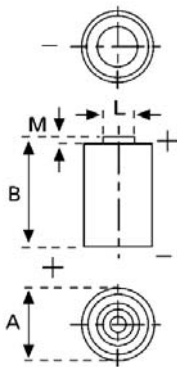

Type Number..... 6231
Designation IEC..... ---
System..... Li-Manganese dioxide/
 Organic Electrolyte

UL Recognition..... pending
Nominal Voltage..... 6 V
Typical Capacity C..... 170 mAh
 Load 13 kOhm, at 20°C down to 4 V

Weight (approx.)..... 8,8 g
Volume..... 3,1 ccm
Coding..... Date of Manufacturing
 Quarter/Year

Temperature Ranges
 Storage..... min -55°C max. 70°C
 Discharge..... min -20°C max. 65°C

Dimensions
 Diameter (A) min 12,8 max. 13,0
 Height (B)..... 24,4 25,1
 Shoulder Diameter [L] 5,5
 Shoulder Height [M] 1,1

Segment..... Electronic

Main Applications..... Photo
 Electronic

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage:	4.0V
Continuous 24h/d, 7d/w Current [µA]	13000 Ω	Time: [h]:	395
		Capacity [mAh]:	170
		Energy [MWh]:	945

All Data contained herein is for single cells
 For battery applications, performance data may vary from single cell data, depending on specific battery configuration