


Data Sheet

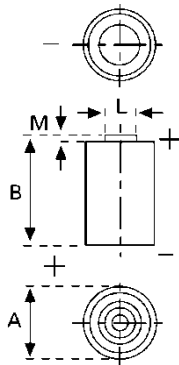

Type Number	6206	
Designation IEC	CR 15H270	
System	Li-Manganese dioxide / Organic Electrolyte	
UL Recognition	MH 13654 (N)	
Nominal Voltage	3 V	
Typical Capacity C	870 mAh	
Load 200 Ohm, at 20°C down to 2 V		
Weight (approx.)	11 g	
Volume	5,2 ccm	
Coding	TBA	
Temperature Ranges	min	max.
Storage	-20°C	45°C
Discharge	-40°C	70°C*
Dimensions	min	max.
Diameter (A)	15,10	15,60
Height (B)	26,30	27,00
Shoulder Diameter[L].....	6,20	6,30
Shoulder Height [M].....	0,70	1,30

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage:	2.0 V
Continuous 24h/d,7d/w	200 Ω	Time:	63 h
		Capacity [mAh]:	870


* Contact VARTA if the application is intended to be outside the range of -20°C to +60°C.

Information and contents in this data sheet are for reference purpose only.
They do not constitute any warranty or representation and are subject to change without notice.
For most current information and further details, please contact your VARTA representative.


Data Sheet

Performance Data:

● Temperature Characteristics

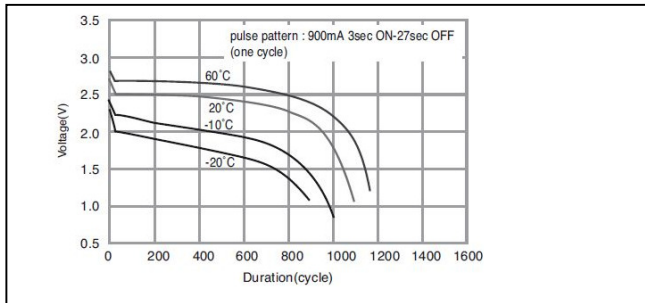


● Pulse discharge characteristics*

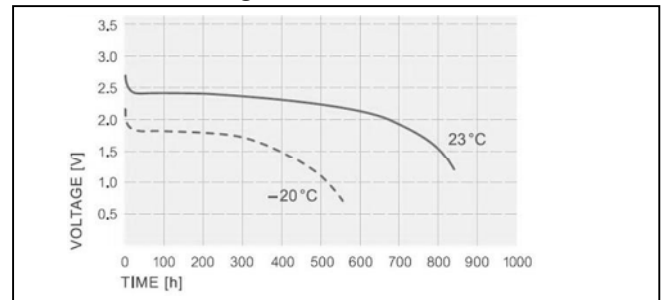

* 1) Load: 0.9A. 3 sec on. 27 sec. off 2) after storage at 60°C/100 days

● Discharge Characteristics*

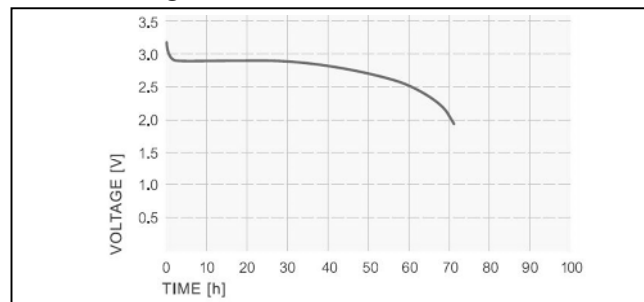

* at room temperature 21°C

- Self-discharge rate < 1% at room temperature
- Storage life > 10 years
- Operating life* > 10 years

* depending on environmental condition and energy consumption

Information and contents in this data sheet are for reference purpose only.
 They do not constitute any warranty or representation and are subject to change without notice.
 For most current information and further details, please contact your VARTA representative.