

PG-2V2500, 2 Volt 2712 AH @ 20-hr. rate PG-2V2500 FR 2500 AH @ 10-hr. rate


Rechargeable Sealed Lead Acid Battery
Designed for Cyclic, Standby, and Solar Applications



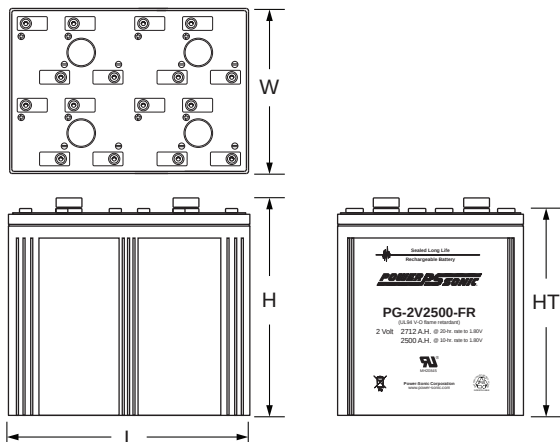
Terminals

(mm)

- T11: Threaded insert w. 6 mm stud fastener



Physical Dimensions: in (mm)



L: 19.29 (490) W: 13.78 (350) H: 14.76 (375) HT: 13.78 (350)

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

Features

- **Long Service Life** - Thick plate design and efficient gas recombination yield a service life expectancy of 15 years in standby mode.
- **Low Internal Resistance** - Superb high-rate discharge characteristics ensure reliable performance.
- **Maintenance-Free, Non-Spillable** - Proven VRLA technology guarantees safe operation without maintenance and 'non-restricted article' status for transportation.
- **Low Self-Discharge** - Lead-calcium alloy grids and use of high purity lead account for superior shelf-life characteristics permitting storage for extended periods of time.
- **Designed-In Reliability** - Cutting-edge manufacturing and process control combined with meticulous quality assurance procedures guarantee consistent and dependable performance.

Performance Specifications

Nominal Voltage 2 volts

Nominal Capacity

20-hr.	(135.6A to 1.80 volts)	2712.0 AH
10-hr.	(250.0A to 1.80 volts)	2500.0 AH
8-hr.	(305.2A to 1.75 volts)	2441.6 AH
5-hr.	(437.5A to 1.75 volts)	2187.5 AH
3-hr.	(662.5A to 1.75 volts)	1987.5 AH
1-hr.	(1625.0A to 1.60 volts)	1625.0 AH

Approximate Weight 291.44 lbs. (132.20 kg)

Energy Density (10-hr. rate) 1.39 W-h/in³ (85.03 W-h/l)

Specific Energy (10-hr. rate) 17.16 W-h/lb (37.82 W-h/kg)

Internal Resistance (approx.) 0.25 milliohms

Shelf Life (% of nominal capacity at 68 °F (20 °C))

1 Month	97%
3 Months	91%
6 Months	83%

Operating Temperature Range

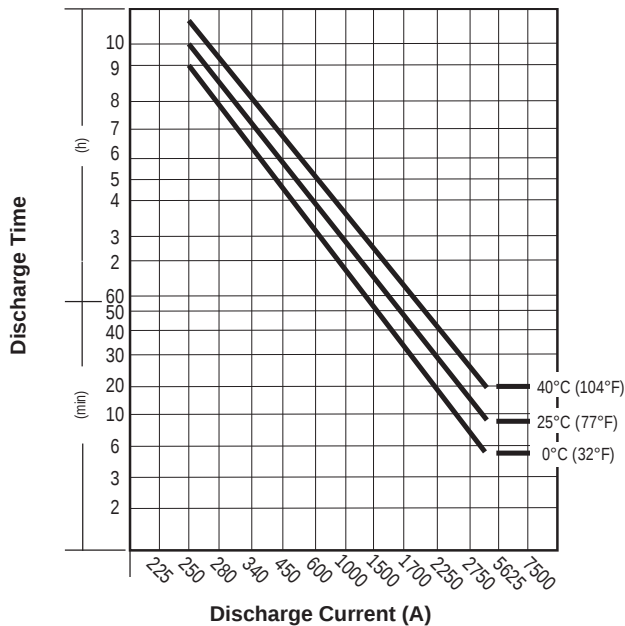
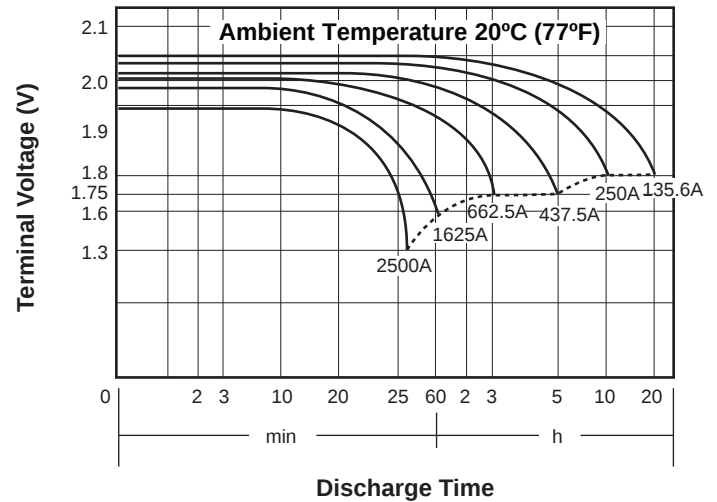
Charge	-4 °F (-20 °C) to 122 °F (50 °C)
Discharge	-40 °F (-40 °C) to 140 °F (60 °C)

Case - 2V2500 ABS Plastic (UL-94-HB rated)

Case - 2V2500 FR ABS Plastic (UL94 V-O flame retardant)

AMPS/WATTS @ 25° C

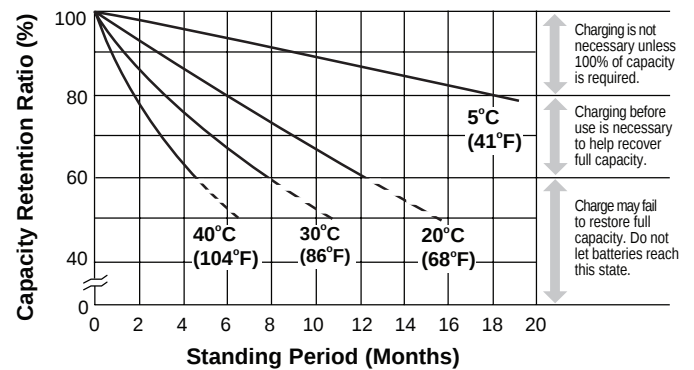
FINAL VOLTAGE	30 MIN	45 MIN	1 HR	2 HR	3 HR	4 HR	5 HR	6 HR	8 HR	10 HR	20 HR
	A/W	A/W	A/W	A/W	A/W	A/W	A/W	A/W	A/W	A/W	A/W
1.85	1714.7/3276.1	1311.6/2746.2	1261.7/2606.8	797.3/1558.3	593.5/1196.2	474.0/955.2	397.5/799.9	354.7/715.3	281.6/565.1	235.5/471.7	128.7/258.0
1.80	1990.9/3766.4	1488.1/3063.9	1406.8/2871.0	837.5/1685.8	642.0/1285.3	509.9/1021.8	426.2/853.5	379.3/761.3	300.0/600.0	250.0/500.0	135.6/271.2
1.75	2083.0/3901.2	1544.3/3149.8	1462.8/2962.5	868.6/1737.5	662.5/1320.0	525.0/1047.5	427.5/872.5	387.5/775.0	305.2/608.8	253.2/505.7	136.9/273.5
1.70	2179.4/4040.1	1601.3/3235.2	1518.2/3051.2	900.0/1790.0	682.9/1353.9	538.8/1070.3	448.8/891.5	397.3/791.7	309.5/616.1	256.6/511.8	138.6/276.5
1.67	2239.8/4128.8	1631.9/3178.4	1548.4/3098.3	918.0/1819.0	692.7/1369.4	547.8/1085.3	455.6/902.9	403.1/801.5	311.9/620.0	258.9/515.9	139.7/278.5
1.60	2375.0/4313.7	1712.5/3395.0	1625.0/3217.5	961.3/1888.5	724.3/1421.7	569.3/1121.0	473.0/932.0	416.8/824.5	317.9/629.9	263.7/524.4	142.6/283.6

Discharge Time vs. Discharge Current

Discharge Characteristics

Charging

Cycle Applications: Limit initial current to less than 250A. Charge until battery voltage (under charge) reaches 2.40 to 2.50 volts at 77°F (25°C) (Temperature Coefficient -5V/C). Hold at 2.40 to 2.50 volts until current drops to under 5.0A. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

"Float" or "Stand-By" Service: Hold battery across constant voltage source of 2.25 to 2.30 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

Note: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Shelf Life & Storage

Further Information

Please refer to our website www.power-sonic.com for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), technical manual, ISO certification, etc..

Contact Information
www.power-sonic.com
DOMESTIC SALES

Tel: +1-619-661-2020
Fax: +1-619-661-3650
national-sales@power-sonic.com

CUSTOMER SERVICE

Tel: +1-619-661-2030
Fax: +1-619-661-3648
customer-service@power-sonic.com

TECHNICAL SUPPORT

Tel: +1-619-661-2020
Fax: +1-619-661-3648
support@power-sonic.com

INTERNATIONAL SALES

Tel: +1-650-364-5001
Fax: +1-650-366-3662
international-sales@power-sonic.com

CORPORATE OFFICE • 7550 Panasonic Way • San Diego, CA 92154 • USA • Tel: +1-619-661-2020 • Fax: +1-619-661-3650

0212 1M